



Installing Motorola V276 Main LCD Screen



Step 1 - disassembly Front panel/ Screen Logic Board

- Using the iPod opening tool pry off the top faceplate.
- Place the tool in the small crack that runs along the side of the phone and pry.




Step 2

- Using the T6 Torx Screwdriver remove all 4 small screws.




Step 3

- Remove silver plate from phone.

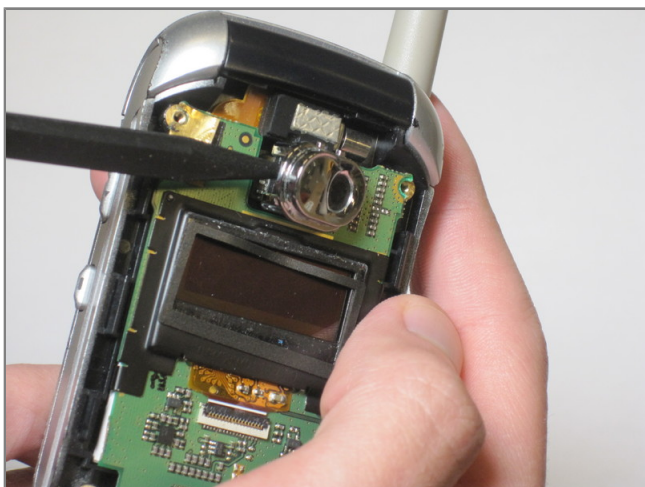

Step 4

- Using the spudger remove the plastic camera casing

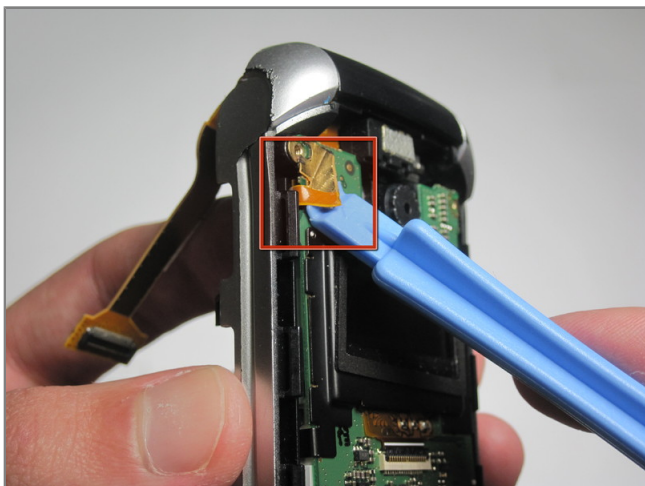


Step 5

- Using the iPod Opening Tool remove the yellow flex cable from the green logic board.



Step 6

- Use Spudger or hands to detach flex cable from front screen logic board

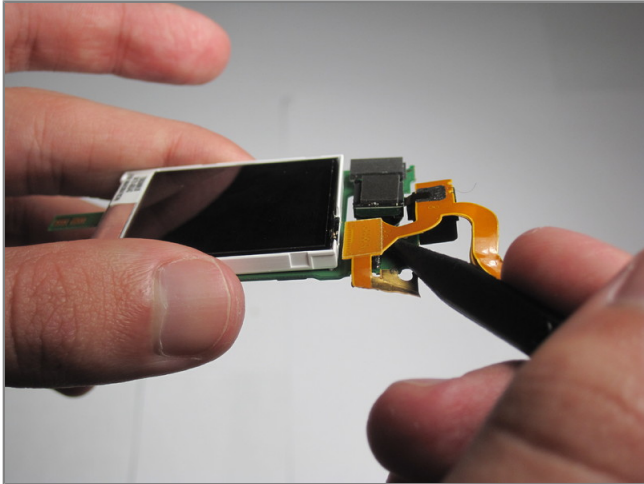

Step 7 - Main LCD Screen

- Using spudger remove the LCD screen from the green logic board.

